


TOOL FEATURES

1. GEARED WITH HIGH FLOW DRIVER GUIDE
 2. DURABLE NOSE ANTI ABRASIVE DRIVER
 3. Four trigger options available :
 - RCVA1 Straight Fitting Type (negative pressure)
 - RCVA2 Elbow Fitting Type (negative pressure)
 - RCVA3 Elbow Fitting Type (positive pressure)
 - Trigger Block
- High speed operation 15 shots/second
 - Exclusive component treatment special-treated nose and driver
 - Automation-gearred for machine-mounted applications




**PN100B-.162 available
for large shank nails**

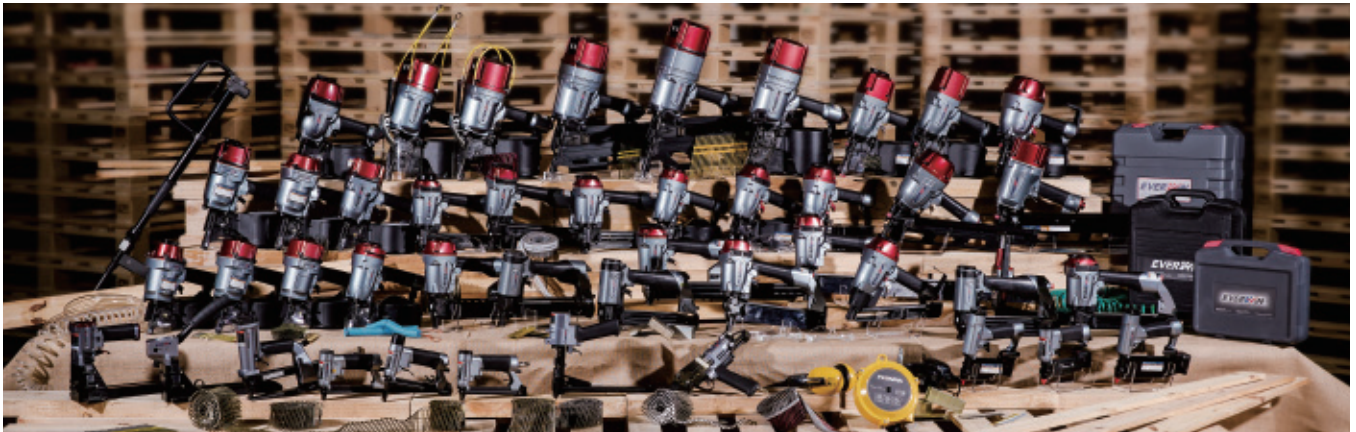

FASTENER SPECS

Type	15° Wire Collated Nails
Loading Capacity	3000+
A	65~100mm (2"-1/2"~4")
B	6.5~7.5mm (0.256"~0.295")
C	3.3~4.1mm (0.131"~0.162")



TOOL SPECS

Weight	4.5 kgs (10 lbs)
Height	410mm (16.4")
Width	130mm (5.1")
Length	350mm (13.8")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	1470 In-lbs @100 psi
Applications	Wooden Pallet, Drum and Crate Construction

