


## TOOL FEATURES

1. Steel hammer exhaust.
  2. Rubber protection pad protects work surface.
  3. Hidden depth adjust knob with investment -casted cover.
  4. Aluminum ergonomic frame over-molded handle grip.
  5. Enlarged rear reservoir minimizes staple stair stepping.
  6. Tool-free rear jam clearance rear exhaust minimizes downtime and maximizes tool durability & operation comfort.
- All metal housing and structure .
  - High speed operation, 15~20 cycles/second.
  - One-piece aluminum cylinder design.
  - Compact engine boosts maneuverability.
  - Pneumatic power adjustment knob.
  - Full automatic version available : **SN41S4A**
  - Two trigger options available :  
**SN41S4-ST (sequential) / SN41S4-CT (contact)**



## FASTENER SPECS

Type	40mm 16 GA. Bostitch BCS4/Atro 16 NC
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	12.5mm (1/2")
C	1.6 x 1.4mm (0.062" x 0.055")

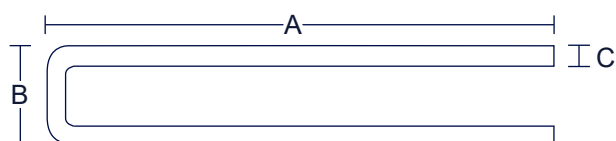

## TOOL SPECS

Weight	2.0 kgs (4.4 lbs)
Height	225mm (8.8")
Width	64mm (2.5")
Length	354mm (13.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	176~237 In-lbs @100 psi
Applications	Pallet, Furniture Frame, Vinyl Siding, Framing, Sheathing

