


AUTOMATION WITH MINIMAL MAINTENANCE

- HIGH SPEED OPERATION, 15 SHOTS/SECOND
- GEARED WITH REMOTE CONTROL TRIGGER VALVE
- GEARED WITH HIGH FLOW DRIVER GUIDE
- FITTED WITH 3/8" NPT FOR 3/8 AIR PLUG

[MACHINE MOUNTED]

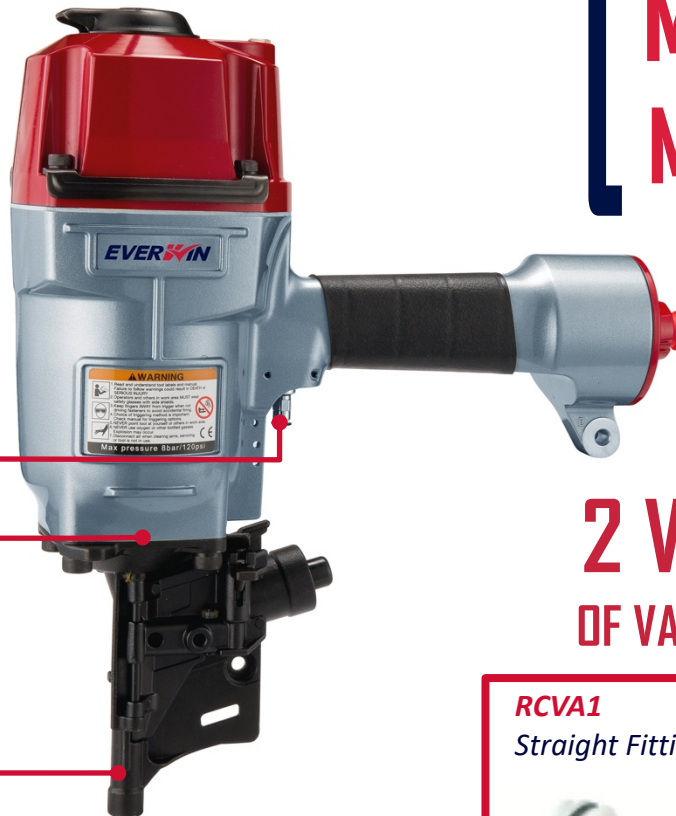

REMOTE CONTROL VALVE ASSEMBLY

Geared with HIGH FLOW DRIVER GUIDE

ANTI-ABRASIVE DRIVER

2 VERSIONS OF VALVES AVAILABLE

RCVA1

Straight Fitting Type



RCVA2

Elbow Fitting Type



FASTENER SPECIFICATION

Collation:	15° Wire Collated
Fastener Lengths:	2"~3-1/4" (50~83mm)
Shank Diameter:	0.099"~0.131" (2.5~3.3mm)
Head Diameter:	0.224"~0.283" (5.7~7.2mm)
Shank Type:	Smooth, Screw, Ring
Load Capacity:	2000~3000

TOOL SPECIFICATION

Weight:	7.2lbs. (3.3kgs)
Height:	14.2" (362mm)
Width:	4.4" (112mm)
Length:	12.1" (307mm)
Operating pressure:	70 to 120 PSI (5-8 bars)
Driving power	837 In-lbs
Firing mode:	Remote Control Actuation
Applications:	Machine-mounted Automatic Operation

